



## SDI 59A30DD11-P20-6PH - Redundancy

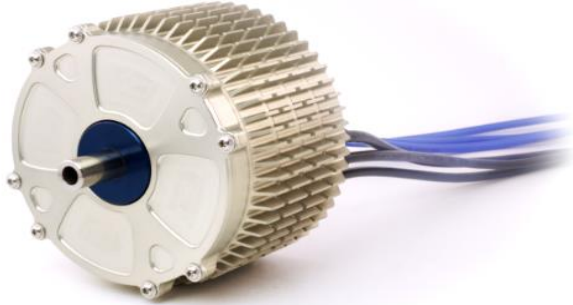

Technical data	
Motor type	SDI 59A30DD11-P20
Bearing type	2RS
Specific speed @SOBEK Auto-Timing [RPM/V]	295 ±5%
Max. speed [RPM]	12.000
No-load current @36 V [A]	2x 2,5 ±5%
Weight [g]	1040
Inner resistance [mΩ]	2x 14 ±5%

Special Features	
Redundancy winding (2x 3 phase), integrated temperature sensor, protection class IP54	

### Motor characteristic curve

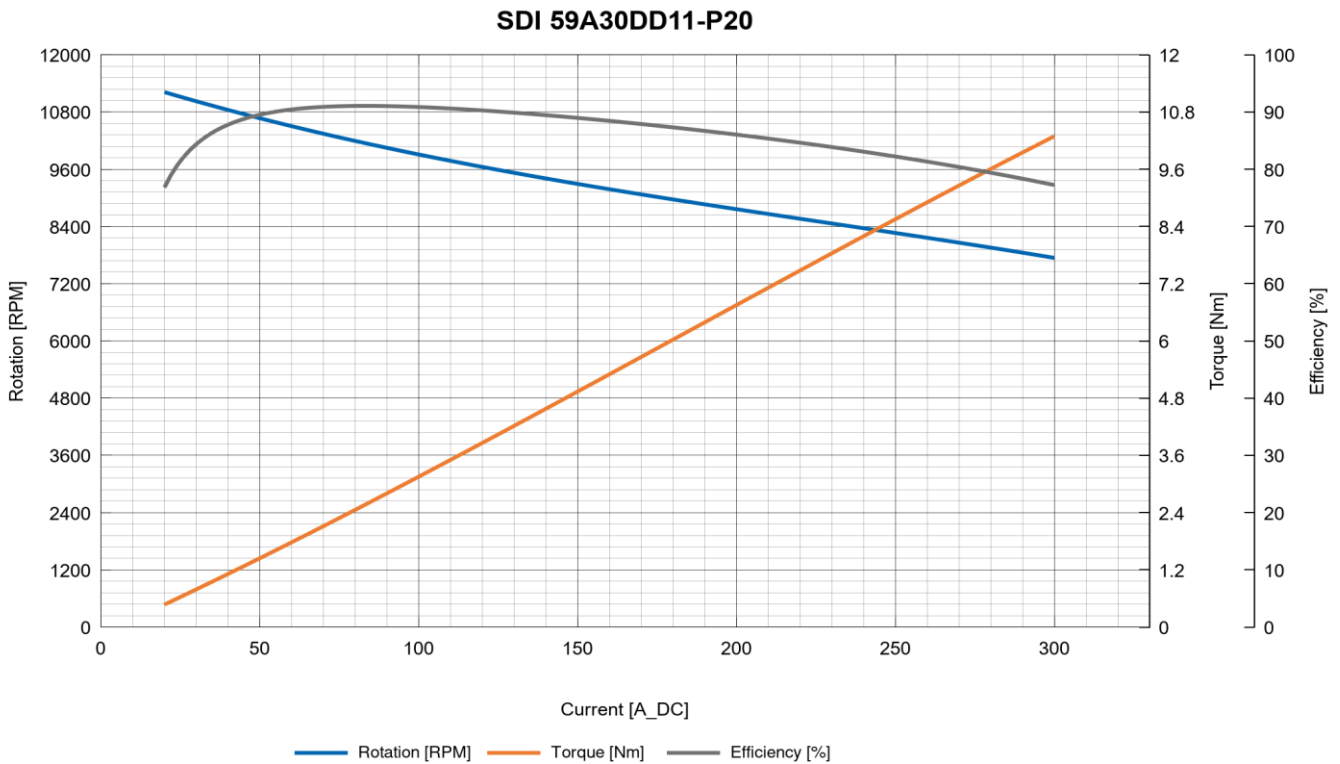

Testing conditions	
Controller	SDC 60-200C
Voltage [V]	36
Timing [°]	20
Throttle setting [%]	2x 100